


Dynablast



INTRODUCING THE NEW
KTX SERIES

DEVELOPED SPECIFICALLY FOR
HYDRO-EXCAVATION

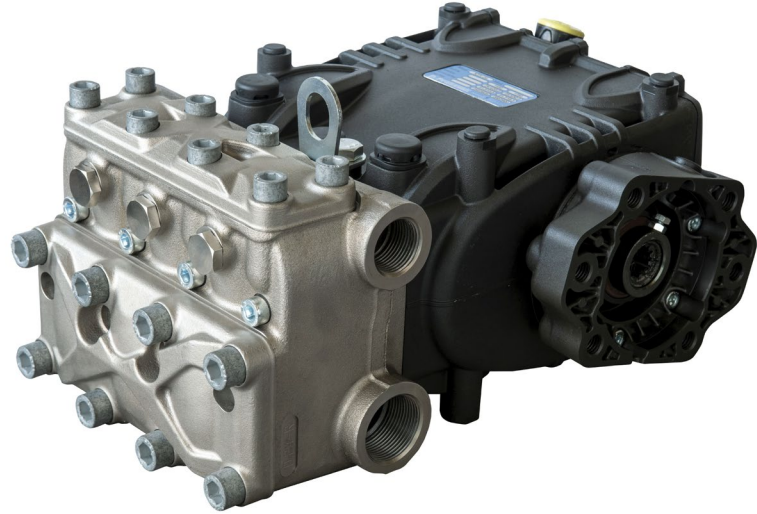

420 STAINLESS STEEL MANIFOLD
RUN DRY SEAL
COMPACT DIRECT-DRIVE DESIGN

- 13T 16/32 DP Female Spline Shaft
- SAE B 2/4 Bolt Flange

Pump	Volume GPM	Pressure PSI	RPM	Power HP	Weight KG
KTX 24	13.5	3625	1450	33	40
	16.3	2900	1750	32	40
KTX 28	18.4	2900	1450	36	40
	22.2	2540	1750	38	40

Available Hydraulic motor:

- Interpump Hydraulics FOX piston 64CC motor
- Loop flush valve built into motor
- Bi-Directional



Dynablast Division of John Brooks Company Limited
2625 Meadowpine Blvd, Mississauga, Ontario L5N 7K5
905 867 4642
www.dynablast.ca