

- **High Limit Switch:**
For added safety
- **Burner Temperature Control:**
Adjust your water temperature with ease.
- **High Pressure Blow-Off Valve:**
For added safety.
- **Compact Design:**
Ideal for tight spaces and stationary applications.
- **Burner ON/OFF Switch**

Cabinet

- 14 gauge steel cabinet
- Polyester powder coated paint
- Stainless steel hinges & hardware
- Reversible hinge door
- Two service access panels
- Gas prop (door)
- Aluminum discharge cap




CAB420FLS-12V (Door Open)



Certified UL1776

- **Primary Control (CAD):**
On burners
- **Stainless Steel Target Plates** in all Coils
- **Momentary Test, Flow & Thermostat**
- **Fuel No. 1 or No 2.**

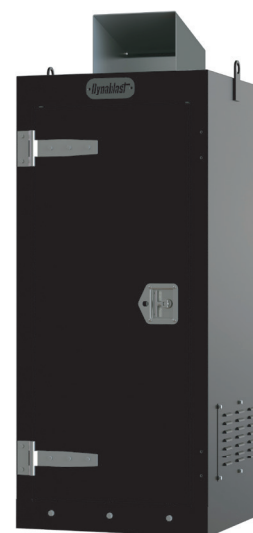

CAB420FLS-12V (Door Closed)

ASSEMBLED IN CANADA

SPECIFICATION	NON-STEAM ETL CERTIFIED		
MODEL	CAB420FLS-12V	CAB690FLS-12V	CAB700FLS
Operating Pressure (PSI)	3500	3500	3500
BTU	420,000	690,000	700,000
Heat Rise	5 GPM @ 120°F	7 GPM @ 165°F	7 GPM @ 170°F
Coil	1/2" Schedule 80	3/4" Schedule 80	3/4" Schedule 80
Burner	Beckett ADC 12V	Beckett SDC 12V	Wayne EH 120V
Fuel Consumption	3.06 GPH	5.06 GPH	5.03 GPH
Coil Water Discharge	Top	Bottom	Bottom
Dimensions (L x W x H)	24" x 24" x 62.5"	27" x 29" x 77"	27" x 29" x 77"
weight	485 lbs	1040 lbs	1040 lbs

Features and specifications subject to change without prior notice.

Dynablast



Distributed by: