



**PRESSURE WASHERS**

**WATER PUMPS**

**GENERATORS**

**LAWN & GARDEN EQUIPMENT**

**FANS & AIR MOVERS**

**ACCESSORIES**

**INDUSTRIAL VACUUMS**



*Professional tools for professional results.*

# PRESSURE WASHERS

## Electric Models

### Commercial Series

**1300 psi**  
**1.85 GPM**



#### 4000R

- 8 metre (26 ft) wire-braided high pressure hose
- High performance Roto-Clean nozzle
- Convenient soap bottle attachment
- Quick connect garden hose coupling
- 1.5hp Induction motor

**1000 psi**  
**2.1 GPM**



#### FORMULA 100

- 8 metre (26 ft) wire braided high pressure hose
- Variable fan nozzle
- Built-in soap-feed system
- Long life Interpump with ceramic plungers

**1000 psi**  
**2.1 GPM**



#### TURBO21

- 8 metre (26ft) wire-braided high pressure hose
- Variable fan nozzle
- Built-in soap feed system
- Bolt on unloader system
- Long life Interpump with ceramic plungers
- 1.5hp Induction motor

#### MODEL COMPARISON CHART

##### Commercial Series

Model	Voltage	Pressure (PSI)	Flow (GP)
4000R	120	1300	1.85
Formula 100	120	1000	2.1
Turbo 21	120	1000	2.1

**KC2100EPC 1.5hp Baldor motor**  
**KC3150EPC 3hp Baldor motor**  
**KC3200EPC 5hp Baldor motor**  
**Motor Speed 3400 rpm**

- 7 metre (23ft) electrical cord
- 9 metre (30ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Integrated soap feed system and adjustable unloader
- Industrial Interpump with ceramic plungers and thermal protection

**"Reversible Handle" allows the user the option of high cart or low cart configuration by simply switching the handles from one side to the other.**



### Professional Series

**1000 psi**  
**2.1 GPM**



#### KC2100EPH

- 1.5hp Baldor motor
- 7 metre (23ft) electrical cord
- 9 metre (30ft) wire-braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Integrated soap feed system and adjustable unloader
- Industrial Interpump with ceramic plungers and thermal protection

**1000 psi – 2000 psi**  
**2.1 GPM – 3.0 GPM**



#### REVERSIBLE HANDLE



#### MODEL COMPARISON CHART

##### Professional Series 3400 rpm

Model	Voltage	Pressure (PSI)	Flow (GP)
KC2100EPH	120	1000	2.1
KC2100EPC	120	1000	2.1
KC3150EPC	240	1500	3.0
KC3200EPC	240	2000	3.0

# PRESSURE WASHERS

## Gasoline Models

### Heavy Duty Consumer

**2000 psi**  
**2.0 GPM**



#### CG2350T

- Briggs & Stratton engine
- 9 metre (30ft) high pressure hose
- 91 cm (36") Lance / gun assembly with adjustable spray nozzle
- Built-in soap injection system
- Thermal protected pump

**2600 psi**  
**2.0 GPM**



#### CG2600T

- 5.5hp Honda GCV engine
- 9 metre (30ft) high pressure hose with hose reel
- 91 cm (36") Lance / gun assembly with adjustable spray nozzle
- Built-in soap injection system
- Thermal protected pump

**2800 psi**  
**2.3 GPM**



#### CG2800R

- 6.0hp Honda GC engine
- 9 metre (30ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Built-in soap injection system
- Thermal protected pump

**2800 psi**  
**2.3 GPM**



#### RT2800

- 7.0 hp Kodiak OHV engine
- 9 metre (30ft) high pressure hose
- 91 cm (36") Lance / gun assembly with adjustable spray nozzle
- Built-in soap injection system
- Thermal protected pump

#### RT2800P

- 7.0 hp Kodiak OHV engine
- 9 metre (30ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Built-in soap injection system
- Thermal protected pump



#### RT4000

- 15hp Kodiak OHV with oil alert
- 15 metre (50ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Built-in soap injection system
- Thermal protected pump
- Industrial Interpump with ceramic plungers and thermal protection

**4000 psi**  
**4.0 GPM**



### MODEL COMPARISON CHART

Model	Peak Pressure (PSI)	Flow (GP)	Engine
CG2350T	2000	2.0	Briggs & Stratton
CG2600T	2600	2.0	5.5 hp Honda (GCV)
CG2800R	2800	2.3	6.0 hp Honda (GC)
RT2800	2800	2.3	7.0 hp Kodiak OHV
RT2800P	2800	2.3	7.0 hp Kodiak OHV
RT4000	4000	4.0	15HP KODIAK OHV

# PRESSURE WASHERS

## Gasoline Models

### Professional Series

**2000 psi - 2500 psi  
3.0 GPM**



**CKC3200GPC  
KC3250GPC**

- 5.5hp (CKC3200GPC) / 6.5hp (KC3250GPC) Honda GX engine with oil alert
- 9 metre (30ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Integrated soap feed system and adjustable unloader
- Industrial Interpump with ceramic plungers and thermal protection

**2500 psi  
3.0 GPM**



**KC3250SUB**

- 7.0hp Subaru EX engine with oil alert
- 9 metre (30ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Integrated soap feed system and adjustable unloader
- Industrial Interpump with ceramic plungers and thermal protection



### REVERSIBLE HANDLE

**Reversible Handle™ allows the user the option of high cart or low cart configuration by simply switching the handles from one side to the other.**



**3500 psi  
3.8 GPM**

**KC4350GPC**

- 13hp Honda GX engine with oil alert
- 15 metre (50ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Integrated soap feed system and adjustable unloader
- Industrial Interpump with ceramic plungers and thermal protection



# PRESSURE WASHERS

## Gasoline Models


### Heavy-Duty Professional Series

**3500 psi**  
**3.8 GPM**



#### KC4350GHD

- 13hp Honda GX engine with oil alert
- 15 metre (50ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Seperate soap feed system and adjustable unloader
- Industrial Interpump with ceramic plungers and thermal protection

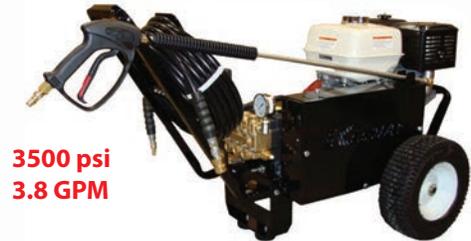

**3500 psi**  
**3.8 GPM**

#### KC4035GPB

- 13hp Honda GX engine with oil alert
- Belt drive (for longer pump life)
- 15 metre (50ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Seperate soap feed system and adjustable unloader
- Industrial Interpump with ceramic plungers and thermal protection

**4000 psi**  
**4.0 GPM**



#### KC4040GHD

- 14hp Subaru EX engine with oil alert
- 15 metre (50ft) wire braided high pressure hose
- 91 cm (36") lance with four quick connect nozzles (0°, 15°, 25° and soap)
- Seperate soap feed system and adjustable unloader
- Industrial Interpump with ceramic plungers and thermal protection

#### MODEL COMPARISON CHART

Model	Pressure (PSI)	Flow (GP)	Engine
CKC3200GPC	2000	3.0	5.5 hp Honda (GX)
KC3250GPC	2500	3.0	6.5 hp Honda (GX)
KC3250SUB	2500	3.0	7.0 hp Subaru (EX)
KC4350GPC	3500	3.8	13.0 hp Honda (GX)
KC4350GHD	3500	3.8	13.0 hp Honda (GX)
KC4035GPB	3500	3.8	13.0 hp Honda (GX)
KC4040GHD	4000	4.0	14.0 hp Subaru (EX)



# PRESSURE WASHERS

## Suitcase Models

### SC2100E

- 1.5hp 115v 1ph 3450RPM Baldor motor
- 13.9 Amp
- Interpump triplex plunger pump (rated 2000 hours)
- Chemical injection
- Thermally protected pump
- PA RL26 gun
- Four quick connect nozzles
- 30ft high pressure wire braided hose
- 28" x 18" x 18"
- 68 lbs
- Compact, stackable design
- Portable design, wheel kit included
- Built-in nozzle holders
- Built-in snap brackets for gun/lance

**1000 psi**  
**2.1 GPM**



SC2100E

**2500 psi**  
**3.0 GPM**



SC2500G

### SC2500G

- 6.5hp Honda GX200 with oil alert
- Interpump triplex plunger pump (rated 2000 hours)
- Chemical injection
- Thermally protected pump
- PA RL26 Gun
- Four quick connect nozzles
- 30ft high pressure wire braided hose
- 28" x 18" x 18"
- 69 lbs
- Compact, stackable design
- Portable design, wheel kit included
- Built-in nozzle holders
- Built-in snap brackets for gun/lance

### MODEL COMPARISON CHART

Model	Pressure (PSI)	Flow (GPM)	Engine/Motor
SC2100E	1000	2.1	1.5HP Baldor 115V
SC2500G	2500	3.0	Honda GX200

**BALDOR**  
BALDOR • DOUG • RELIANCE

**HONDA**  
ENGINES



# PRESSURE WASHERS

## Hot Water Models

### Diesel Heated Burners



KEH1000EF



KEH2500EF



KEH2700GF



KEH3500GF



MOD3000F



### MODEL COMPARISON CHART

Model	Pressure (PSI)	Flow (GPM)	Engine / Motor	BTU	Burner	Dimensions	Weight
KEH1000EF	1000	2.1	1.5HP Baldor 115V	172,000	Diesel 115V	42" x 26" x 40"	290 lbs
KEH2500EF	2500	3.0	5HP Baldor 230V	300,000	Diesel 230V	42" x 28" x 43"	420 lbs
KEH2700GF	2700	2.5	7HP Subaru EX	300,000	Diesel 12V	42" x 18" x 32"	389 lbs
KEH3500GF	3500	4.0	13HP Honda GX	300,000	Diesel 12V	42" x 28" x 43"	440 lbs
MOD3000F	Up to 3500	Up to 4.0	-	315,000	Diesel 115V	54" x 30" x 45"	380 lbs

# WATER PUMPS

## General Purpose Models

**PWP1H**  
**PWP2HX**  
**PWP3HX**  
**PWP4HX**

- Powered by Honda GX engines with oil alert (excluding PWP1H)
- Cast aluminum pump housing
- Cast iron impeller and volute
- Carbon ceramic mechanical seal

**Standard Accessories:** 1 strainer, 2 hose couplings, 2 hose barbs, 2 seals



**PWP1H**



**PWP2HX**



**PWP3HX**



**PWP4HX**

**HONDA**  
**ENGINES**

### MODEL COMPARISON CHART

Model	Engine	Port Size	Max Capacity	Suction Lift	Max Head	Handles Solids	Weight
PWP1H	1 hp Honda (GX25)	1" x 1"	31 gpm	26 ft	114 ft	1/4"	10 lbs
PWP2HX	4 hp Honda (GX120)	2" x 2"	137 gpm	26 ft	106 ft	1/4"	52 lbs
PWP3HX	5.5 hp Honda (GX160)	3" x 3"	264 gpm	26 ft	137 ft	1/4"	66 lbs
PWP4HX	8 hp Honda (GX240)	4" x 4"	476 gpm	26 ft	93 ft	1/4"	110 lbs

# WATER PUMPS

## Trash & Semi Trash Models

### Trash Pumps


#### PWP2SWT

#### PWP3SWT

#### PWP4SWT

- Powered by Honda GX engines with oil alert
- Cast aluminum pump housing
- Cast iron impeller and volute
- Silicon carbide mechanical seal

**Standard Accessories:** 1 strainer, 2 hose couplings, 2 hose barbs, 2 seals

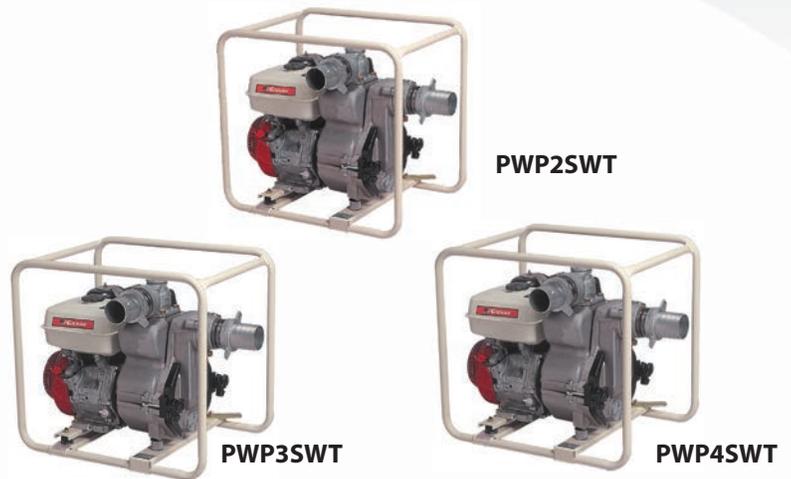

**HONDA**  
**ENGINES**

#### MODEL COMPARISON CHART

Model	Engine	Port Size	Max Capacity	Suction Lift	Max Head	Handles Solids	Weight
PWP2SWT	5.5 hp Honda (GX160)	2" x 2"	158 gpm	26 ft	85 ft	1"	74 lbs
PWP3SWT	8 hp Honda (GX240)	3" x 3"	343 gpm	26 ft	92 ft	1"	132 lbs
PWP4SWT	11 hp Honda (GX340)	4" x 4"	530 gpm	26 ft	79 ft	1"	147 lbs

### Semi-Trash Pumps

#### PWP2SST

#### PWP3SST

- Powered by Honda GX engines with oil Alert
- Cast aluminum pump housing
- Cast iron impeller and volute
- Silicon carbide mechanical seal

**Standard Accessories:** 1 strainer, 2 hose couplings, 2 hose barbs, 2 seals



**HONDA**  
**ENGINES**

#### MODEL COMPARISON CHART

Model	Engine	Port Size	Max Capacity	Suction Lift	Max Head	Handles Solids	Weight
PWP2SST	4.0 hp Honda (GX120)	2" x 2"	185 gpm	26 ft	76 ft	3/4"	46 lbs
PWP3SST	5.5 hp Honda (GX160)	3" x 3"	264 gpm	26 ft	76 ft	3/4"	57 lbs

# WATER PUMPS

## Submersible Models

### General Purpose

#### PSP125ABK

##### 1" Electric Submersible Pump

- 0.15 hp
- ABS casing
- Side suction
- 304 Stainless steel motor casing, rotor shaft
- Motor with thermal overload protection
- Built in auto thermal overload reset
- Top discharge with garden hose connection
- 33 ft power cable
- Silicon carbide mechanical seal
- CSA certified product



PSP125ABK

#### PSP200SSK

##### 2" Electric Submersible Pump

- 1/2 hp, 115v
- 304 Stainless steel casing
- Side suction
- Double mechanical seals (Carbon & Silicon carbide)
- Motor with thermal overload protection
- Built in auto thermal overload reset
- Top discharge
- 33 ft power cable
- CSA certified product



PSP200SSK

### MODEL COMPARISON CHART

Model	Discharge Size	Motor/Volt/RPM	Rated Amps	Max Head	Max Capacity	Dimensions (H x W)	Weight
PSP125ABK	1"	0.15hp/115v/3450 rpm	2 amp	19.6 ft	21 gpm	11" x 5"	9 lbs
PSP200SSK	2"	1/2hp/115v/3450 rpm	7.6 amp	35 ft	66 gpm	14.6" x 6.5"	33 lbs

### Trash Submersible Pumps

#### PSP200SVX

##### 2" Electric Trash Submersible Pump

- 304 Stainless steel motor casing
- Cast Iron vortex impeller
- Cast Iron volute
- Double mechanical seals (Carbon & Silicon carbide)
- Motor with thermal overload protection
- Built in auto thermal overload reset
- Side discharge
- 33 ft power cable
- CSA certified product



PSP200SVX

#### PSP300SVX

##### 3" Electric Trash Submersible Pump

- 304 Stainless steel motor casing
- Cast Iron vortex impeller
- Cast Iron volute
- Double mechanical seals (Carbon & Silicon carbide)
- Motor with thermal overload protection
- Built in auto thermal overload reset
- Side discharge
- 33 ft power cable
- CSA certified product



PSP300SVX

### MODEL COMPARISON CHART

Model	Discharge Size	Motor/Volt/RPM	Rated Amps	Max Head	Max Capacity	Handles solids	Dimensions (H x W)	Weight
PSP200SVX	2"	1/2hp/115v/3450 rpm	7.5 amp	22 ft	59 gpm	1.5"	18.4" x 8.5"	40 lbs
PSP300SVX	3"	1hp/115v/3450 rpm	14 amp	31.5 ft	100 gpm	2"	20.5" x 11"	68 lbs

## Specialty Models

### Liquid Chemical Transfer Applications

- PWP2P5GC
- PWP2CH5GX
- PWP2P7RT (7hp Kodiak OHV Engine)
- PWP3P13GX
- PWP3P15RT (15hp Kodiak OHV Engine)

**HONDA**  
**ENGINES**



PWP2P5GC



PWP3P15RT

### High Pressure Applications

- PWP15SCH4070
- PWP2SCH5050

**Standard Accessories:** 1 strainer, 2 hose couplings, 2 hose barbs, 2 seals

**HONDA**  
**ENGINES**



PWP15SCH4070



PWP2SCH5050

### Sand, Mud and Sludge Removal

- PWP3SMD

**Standard Accessories:** 1 strainer, 2 hose couplings, 2 hose barbs, 2 seals

**HONDA**  
**ENGINES**



PWP3SMD

#### MODEL COMPARISON CHART

Model	Engine	Port Size	Max Capacity	Suction Lift	Max Head	Pump Material	Weight
PWP2P5GC	5 hp Honda (GC160)	2" x 2"	150 gpm	25 ft	134 ft	Poly	46 lbs
PWP2CH5GX	5.5 hp Honda (GX160)	2" x 2"	150 gpm	25 ft	134 ft	Poly	49 lbs
PWP2P7RT	7 hp Kodiak OHV	2" x 2"	150 gpm	25 ft	134 ft	Poly	48 lbs
PWP3P13GX	13 hp Honda (GX390)	3" x 3"	440 gpm	25 ft	125 ft	Poly	110 lbs
PWP3P15RT	15 hp Kodiak OHV	3" x 3"	440 gpm	25 ft	125 ft	Poly	115 lbs
PWP15SCH4070	5.5 hp Honda (GX160)	1.5" x 1.5"	103 gpm	26 ft	233 ft	Aluminum	59 lbs
PWP25CH5050	5.5 hp Honda (GX160)	2" x 2"	106 gpm	26 ft	167 ft	Aluminum	59 lbs
PWP3SMD	5.5 hp Honda (GX160)	3" x 3"	65 gpm	26 ft	50 ft	Aluminum	99 lbs

# WATER PUMPS

## High Flow Trash Models

### Intermittent Duty

#### 5587-Y6

- Yanmar 3TNM72 Diesel Engine
- Aluminum Centrifugal Pump
- 6" x 6" Port Size
- 990 gpm Max Capacity
- 20 ft Lift
- 98 ft Max Head
- 3" Solids Handling
- 99" L x 48" W x 62" H
- 1250 lbs

**YANMAR**

#### 5585-H6

- Honda V Twin Es Engine
- Aluminum Centrifugal Pump
- 6" x 6" Port Size
- 990 gpm Max Capacity
- 20 ft Lift
- 98 ft Max Head
- 3" Solids Handling
- 99" L x 48" W x 62" H
- 1000 lbs

**HONDA  
ENGINES**

#### 5585-B6

- B&S Vanguard V Twin ES Engine
- Aluminum Centrifugal Pump
- 6" x 6" Port Size
- 990 gpm Max Capacity
- 20 ft Lift
- 98 ft Max Head
- 3" Solids Handling
- 99" L x 48" W x 62" H
- 1075 lbs

**BRIGGS & STRATTON**

**AMT**  
A Gorman-Rupp Company



5587-Y6

### Continuous Duty

#### 16D60-F3L

- Deutz F3L Diesel Engine
- Cast Iron Centrifugal Pump
- Titanium Carbide Seal
- 6" x 6" Port Size
- 780 gpm Max Capacity
- 95 ft Max Head
- 2.62" Solids Handling
- 2670 lbs

**DEUTZ**

#### 16D60-4024T

- John Deere 4024T Diesel Engine
- Cast Iron Centrifugal Pump
- Titanium carbide seal
- 6" x 6" Port Size
- 780 gpm Max Capacity
- 95 ft Max Head
- 2.62" Solids Handling
- 2670 lbs

**JOHN DEERE**

**GR**  
GORMAN-RUPP  
PUMPS



16D60-F3L

# GENERATORS

## Standard Models

### KD3000VR

- 5.5hp Honda GX engine with oil alert
- Voltage regulator
- Non fuse breakers
- 16 L tank capacity
- Run time (half load) 12.1 hours
- 23½" L x 18½" W x 19½" H
- 102 lbs



### KD5500VR (S)\*

- 11hp Honda GX engine with oil alert
- Voltage regulator
- Non fuse breakers
- 25 L tank capacity
- Run time (half load) 8.5 hours
- 27" L x 23" W x 21" H
- 171 lbs
- KDWHEELHKKIT included



### \* Add (S) for electric start

- 177 lbs

### KD7000VR (S)\*

- 13hp Honda GX engine with oil alert
- Voltage regulator
- Non fuse breakers
- 25 L tank capacity
- Run time (half load) 7.6 hours
- 27" L x 23" W x 21" H
- 179 lbs
- KDWHEELHKKIT included



### \* Add (S) for electric start

- 185 lbs



Shown with Wheelkit / Lifting Hook  
(KDWHEELHKKIT)

### SGA2300GC

- 5hp Honda GC engine with oil alert
- Voltage regulator
- Non fuse breakers
- 1.7 L tank capacity
- Run time (half load) 2.3 hours
- 22" L x 16" W x 16" H
- 70 lbs



### SXA3000HX

- 5.5hp Honda GX160 OHV
- Voltage regulator
- Non fuse breakers
- 3.7 L tank capacity
- Run time (half load) 4 hours
- 22" L x 16" W x 16" H
- 74 lbs



**HONDA**  
ENGINES



### MODEL COMPARISON CHART

Model	AC Output	Maximum Output	Rated Output	Rated Amps
SGA2300GC	120V	2300W	2000W	17A
SXA3000HX	120V	3000W	2500W	19A
KD3000VR	120V	3000W	2400W	20A
KD5500VR (S)	120V / 240V	5500W	4800W	40A/20A
KD7000VR (S)	120V / 240V	7000W	6000W	50A/25A

# GENERATORS

## Specialty Models

### Diesel

#### KD5000D

- 6.7hp KD350 Kohler diesel engine (ES)
- Non fuse breakers
- 20 L tank capacity
- Run time (half load) 22 hours
- Full power in rush feature (120V)
- Load monitor
- 29¼" L x 22" W x 23¾" H
- 205 lbs



**KOHLER**

#### KD7300D

- 9.4hp OC95E3 Kubota diesel engine (ES)
- Non fuse breakers
- 20 L tank capacity
- Run time (half load) 16 hours
- Engine glow plug
- Full power in rush feature (120V)
- Load monitor
- 31½" L x 21" W x 23¾" H
- 270 lbs



**Kubota**

### Industrial

#### SXB12000HXV

- GX630 Honda GX engine with oil alert
- Electric start
- Automatic idle control
- Volt meter and voltage regulator
- Non fuse breakers
- 44 L tank capacity
- Run time (half load) 12 hours
- 32" L x 22" W x 29" H
- 348 lbs
- WK214 (Wheelkit) included



**HONDA  
ENGINES**

### Welder / Generator

#### EMWDC160

- 11hp Honda GX340 OHV engine
- 3000W Generator
- 65 L tank capacity
- Run time (half load) 4 hours
- 150A / 60% intermittent output
- 40 -165A continuous welding
- 28" L x 20" W x 21" H
- 183 lbs



**HONDA  
ENGINES**

#### MODEL COMPARISON CHART

Model	AC Output	Maximum Output	Rated Output	Rated Amps
KD5000D	120V / 240V	5000W	3750W	31.25A/15.6A
KD7300D	120V / 240V	7300W	6000W	50A/25A
SXB12000HXV	120V / 240V	12000W	10000W	92A/42A
EMWDC160	120V / 240V	3500W	3000W	24A/12A

## Stump Grinder, Logsplitter

### Stump Grinder

#### LGSG13HC

- 13hp Honda GX390 OHV engine
- Recoil start
- Operating 3600 rpm
- Disc 2275 rpm
- 14" x 3/8" cutter wheel
- Teeth size - 1/2"
- 20" above grade & 16" below grade cutting capacity
- 320 lbs



**HONDA**  
ENGINES

### Logsplitter

#### LS20HC

- 5.5hp Honda GX160 OHV engine
- 20 ton splitting power
- 14 sec. cycle time
- 24" stroke cylinder
- 4" bore
- 87" L x 49" W x 42" H
- 400 lbs



**HONDA**  
ENGINES

# LAWN & GARDEN

## Sod Cutter, Dethatcher, Aerator

### Sod Cutter

#### LGSC19HC

- 9hp Honda GX270 engine
- Cutting width 14"
- Cutting depth up to 2.5"
- Cutting speed 2.5 mph
- Traveling speed 2.8 mph
- 69" L x 29" W x 37" H
- 440 lbs

**HONDA**  
**ENGINES**



### Dethatcher

#### LGLC52HC

- 5.5hp Honda GX160 OHV engine
- 20 tempered spring-steel blades
- 18" combing width
- 40.5" L x 26.75" W x 36.5" H
- 138 lbs

**HONDA**  
**ENGINES**



Handle folds down

### Aerator

#### LGAR24HC

- 5.5hp Honda GX160 OHV engine
- 17.5" aerating width
- Up to 3" aerating depth
- 4.4" x 7.8" aerating pattern
- 48" L x 26.5" W x 49.5" H
- 265 lbs

**HONDA**  
**ENGINES**



## Barrel, Pedestal, Air Mover

### Barrel

#### AMFE36N

- 36" 2-Speed belt-drive cooling barrel fan
- Heavy duty steel frame
- Powder coated finish
- 2/3 HP, 120V, 1phase
- RPM – 580 - 650
- CFM – 9100 -11200
- 4 Aluminum blades
- 38.5" L x 20.3" W x 39.6" H
- 68.3 lbs



#### AMFE42

- 42" 2-Speed belt-drive cooling barrel fan
- Heavy duty steel frame
- Powder coated finish
- 1 HP, 120V, 1phase
- RPM – 520 - 600
- CFM – 12600 -16800
- 4 Aluminum blades
- 44.4" L x 20.3" W x 45.2" H
- 87 lbs



### Pedestal

#### AMFS30

- 30" 3-Speed direct-drive pedestal fan
- Heavy duty steel frame
- Powder coated finish
- 1/3 HP, 120V, 1phase
- RPM – 900 -1000-1100
- CFM – 6780 -7500-8778
- 3 Aluminum blades
- 32.8" L x 27" W x 84.5" H
- 57.5 lbs



Pivot



### Air Mover

#### AMSTFJ12

- 12" High Capacity
- 120V, 1 phase
- RPM – 3300
- CFM – 2905
- 7 Aluminum blades
- Air mover: 14" L x 12.8" W x 16.2" H
- Duct: 12.8" x 20' ft. long
- 24.2 lbs
- Hose optional



# ACCESSORIES

## Pressure Wash

### Pressure Wash Accessories



RL26 RL35 RL56 G250VA

#### Gun

- RL26 - 4050 psi
- RL35 - 3200 psi
- RL56 - 5100 psi
- G250VA - 4500 psi



PWQC00045 PWQC15045 PWQC25045 CHQC25040

#### Spray Nozzle

- PWQC00045 - 0 degree #4.5
- PWQC15045 - 15 degree #4.5
- PWQC25045 - 25 degree #4.5
- CHQC25040 - Nozzle spray soap



UR2504 UR3204 UR1604

#### Specialized Rotating Nozzle

- UR2504 - 1150 psi min - 3650 psi max
- UR3204 - 2600 psi min - 5100 psi max
- UR1604 - 435 psi min - 2300 psi max



#### Hose - 4000 psi

- HW30 - Hose Length - 30 ft
- HW50 - Hose Length - 50 ft
- HW100 - Hose Length - 100 ft



#### Hose Reel

- HR50 - Hose Capacity 50 ft
- HR100 - Hose Capacity 100 ft
- HR150 - Hose Capacity 150 ft
- HR200 - Hose Capacity 200 ft



#### Lance

- L7 - 36" two section zinc plated
- L12 - 8" two section stainless steel
- L70 - 27.5" single lance
- L90 - 35.4" single lance
- LL1090 - 43" dual lance



#### Water Boom

- WB12 - 12" long, three 1/4" nozzle ports
- WB16 - 16" long, four 1/4" nozzle ports
- GP965013M - Replacement nozzle



#### Foamer

- FML01 - 2900 psi
- FML01T - Foamer with 1L Tank
- FML02T - Foamer with 2L Tank



#### Telescopic Wand

- DLTG12 - Length 6-12 ft., Weight 9.2 lbs
- DLTG18 - Length 6-18 ft., Weight 11.6 lbs
- DLTG24 - Length 6-24 ft., Weight 14.2 lbs

### Pressure Wash Chemicals



- KODIAKDEG4 4 Litre bottle heavy-duty degreaser - (4 bottles/case)
- KODIAKDFC4 4 Litre bottle deck & fence cleaner - (4 bottles/case)
- KODIAKAPC4 4 Litre bottle all-purpose cleaner - (4 bottles/case)
- KODIAKHWW4 4 Litre bottle house & window cleaner - (4 bottles/case)
- KODIAKCBW4 4 Litre bottle car & boat wash 'n' wax - (4 bottles/case)

# ACCESSORIES

## Water Pump/Vacuum

### Water Pump Accessories



**Bottom Hole Strainers**  
PWP-BS200 - 2" (50 mm)  
PWP-BS300 - 3" (80 mm)



**Polyethylene Suction Hose Strainers**  
PWP-PS200 - 2" (50 mm)  
PWP-PS300 - 3" (80 mm)



**FNWP - Fog Nozzle**  
1.5" NPSM Polycarbonate  
Fog Nozzle. ULC listed.



**Long Thin Hole Strainers**  
PWP-LS200 - 2" (50 mm)  
PWP-LS300 - 3" (80 mm)  
PWP-LS400 - 4" (100 mm)



**Standard Square Hole Strainers**  
PWP-SS200 - 2" (50 mm)  
PWP-SS300 - 3" (80 mm)  
PWP-SS400 - 4" (100 mm)



**Top Hole Strainers**  
PWP-TS200 - 2" (50 mm)  
PWP-TS300 - 3" (80 mm)  
PWP-TS400 - 4" (100 mm)



**Standard Round Hole Strainers**  
PWP-RS150 - 1½" (40mm)  
PWP-RS200 - 2" (50 mm)  
PWP-RS300 - 3" (80 mm)  
PWP-RS400 - 4" (100 mm)



**Poly Suction Hose with Aluminum Female Coupler and Male Adapter.**  
SH15ALUM - 1½" x 50 ft  
SH2ALUM - 2" X 50 ft  
SH3ALUM - 3" x 50 ft  
SH4ALUM - 4" x 50 ft



**Discharge Hose with Aluminum Female Coupler and Male Adapter.**  
DH15ALUM - 1½" x 50 ft  
DH2ALUM - 2" X 50 ft  
DH3ALUM - 3" x 50 ft  
DH4ALUM - 4" x 50 ft


### Vacuum Accessories



**Frontal Tools**  
SV00041



**Dry Vacuum Kit**  
(SV700) SV02772



**Hepa Filter**  
SV02995



**Filters**

# INDUSTRIAL VACUUMS



**SV315PI\***  
• 11 gallon, polypropylene tank



**SV315\***  
• 11 gallon, polyethylene tank



**SV515\***  
• 10 gallon, steel tank



**SV415M\***  
• 24 gallon, polyethylene tank  
• Convenient handle, large wheels and built in tank drain



**SV420T\***  
• 30 gallon, polyethylene tank  
• Hinged cart design allows for easy tipping of tank contents



**SV700**  
• 9 gallon, polyethylene tank  
• 3 gallon, detergent tank  
• 4.5m (15ft) flexible hose with detergent applicator and upholstery tool  
• Swivel casters for easy mobility



**SV800\***  
• 21 gallon, stainless steel tank  
• Upper canister with cyclone system to filter dust and fine particles

## MODEL COMPARISON CHART

Model	Motor	Watts	Air Flow	Water Lift
SV315PI	1.5 hp	1080W	100CFM	90°
SV315	1.5 hp	1080W	100CFM	90°
SV515	1.5 hp	1080W	100CFM	90°
SV415M	1.5 hp	1080W	100CFM	90°
SV420T	2 x 1 hp	2 x 750W	165CFM	70°
SV700	1.5 hp	1080W	100CFM	90°
SV800	2 x 1 hp	2 x 750W	165CFM	-

### \* Standard Accessories Package 2

Included with Models

SV315PI

SV315

SV515

SV415M

SV420T

SV800

- 3m (10ft) flexible hose
- 8.5m (28ft) long power cord
- Swivel casters for easy mobility



DISTRIBUTED BY:

